



European Patent Office

Office européen des brevets



(11)

EP 1 189 397 A2

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:

20.03.2002 Bulletin 2002/12

(51) Int Cl.⁷: **H04L 12/56**, H04L 29/06,

H04L 12/28, H04L 12/58

(21) Application number: 01122034.0

(22) Date of filing: 13.09.2001

(84) Designated Contracting States:

AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR

Designated Extension States:

AL LT LV MK RO SI

(30) Priority: 13.09.2000 US 661405

(71) Applicant: **HARRIS CORPORATION**
Melbourne Florida 32919 (US)

(72) Inventor: Kroon, Jeffrey

Canandaigua, NY 14424 (US)

(74) Representative: **Fleuchaus, Leo, Dipl.-Ing. et al**

Fleuchaus & Gallo

Melchiorstrasse 42

81479 München (DE)

(54) **A system and method of conserving bandwidth in the transmission of message packets**

(57) A system and method of increasing message throughput in a communications system utilizing priority management, conglomeration and compression, TCP retransmission filtering and pull transmission. The priority manages ranks the messages in a message queue as a function of the priority and time to live of each mes-

sage. The conglomeration conglomerators messages into assemblies destined for the same destination radio. The TCP filter prevents the retransmission of the successfully received messages. The messages are transmitted as a function of the availability of the destination radio to receive.

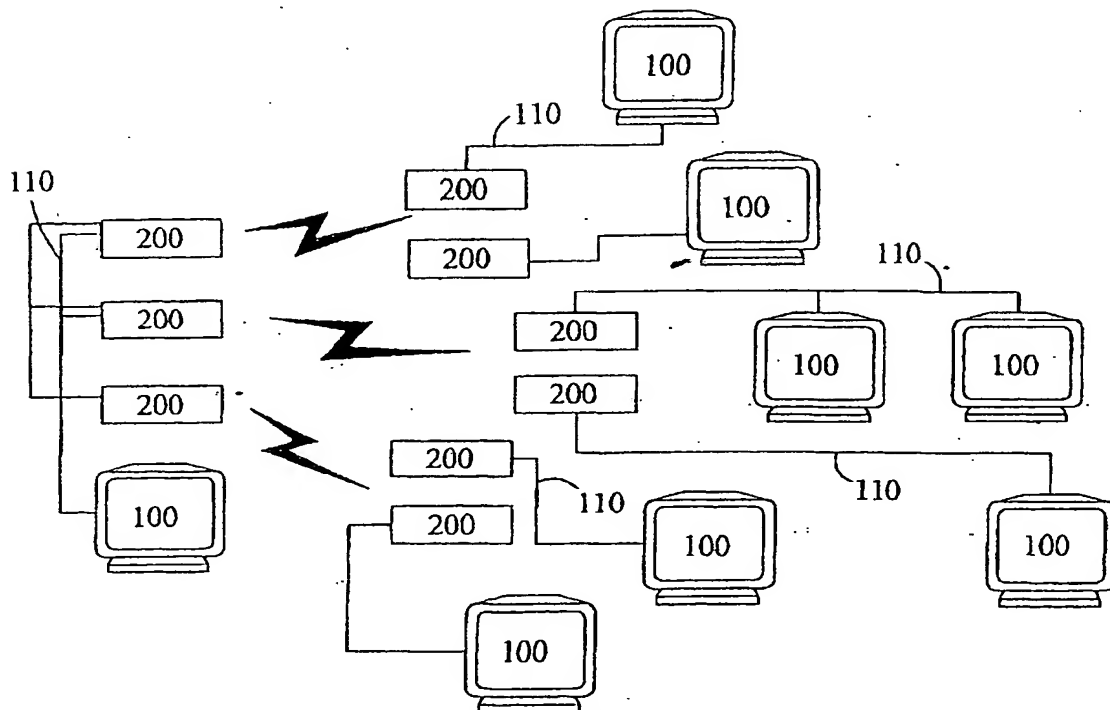


FIGURE 1

EP 1 189 397 A2

Description

[0001] The present invention is directed to conserving bandwidth and increasing the message throughput in a packet switching communications network.

[0002] In a conventional packet switching network, the data to be sent is divided into individual packets of data, involving a process of segmentation or subdivision of larger sets of data as specified by the native protocol of the transmitting device. Each packet typically includes a header, payload and trailer. The header contains the control information, such as source and destination addresses, sequence numbers, synchronizing bits and length of the packet. The payload is the data to be transmitted. The trailer generally includes error detection and correction bits.

[0003] Each packet has an identification number and each packet carries its own destination station address. Each packet is independent, with multiple packets in a stream of packets often traversing the network from source station to destination station by different routes. Since the packets may follow different physical paths of varying lengths, they may experience various levels of propagation delay, known as latency. As a result, the packets may arrive in a different order than they were presented to the network. The packet sequence number allows the destination station to reassemble the packet data in the proper sequence before presenting it to the ultimate destination application.

[0004] Packet switching was originally developed to support interactive communications between asynchronous computers for time-share applications allowing for varying levels of latency and yielding a high level of efficiency for digital data networking. Isochronous data such as real-time voice and video, on the other hand, are stream-oriented and highly intolerant of latency. As a result, packet switched networks were originally thought to be inappropriate for such applications. Recent developments of communications software and complex compression algorithms have increased the suitability of packet switching for such real-time applications. The most widely used public packet switching network is the Internet.

[0005] Transmission Control Protocol (TCP) and Internet Protocol (IP) are the most complete and accepted network protocols for a packet switched network. Prior to transmission of data, TCP is responsible for breaking the message into packets, sized appropriately for the network. TCP marks the packets with the sequence numbers that allows the destination station to properly reassemble the packets into the original message. TCP also verifies the accuracy of the data transmitted through the use of checksums, a simple mathematical computation applied to the data contained in the packet. The destination station does the same calculation on the received data and compares the result with the checksum sent with the packet. If the results match, the destination station sends an acknowledgment message to

the source station. If the source station does not receive a TCP acknowledgment message within a predetermined period of time, the source station will re-transmit the unacknowledged packet, and this process is repeated until receipt is acknowledged, thereby ensuring successful communication. Delays in the acknowledgment message reaching the source station may cause unnecessary retransmissions of message packets which have been previously successfully transmitted.

[0006] IP is the messenger protocol which basically addresses and sends the packets. IP attempts to deliver every packet but has no provision for retransmitting lost or damaged packets. IP leaves such error correction, if required, to higher level protocols, such as TCP. Together, TCP/IP is the most accepted networking protocol. Virtually all modern operating systems offer TCP/IP support, and most large networks rely on TCP/IP for all their network traffic.

[0007] While designed initially for wired networks, TCP/IP has now been recognized as the desired protocol for wireless networks as well. However, the wireless environment presents additional concerns such as reduced bandwidth, higher operating costs associated with radio transmissions, and the half-duplex nature of some wireless systems. As a result, conventional methods of message management that have been utilized for wired networks may not be sufficient for wireless circuits.

[0008] For example, conglomeration methods have been used in wired systems to conserve bandwidth. These conventional techniques have been applied to wireless systems as well. In a wireless system, each station has at least one associated radio for transmitting message packets from station to station. A conventional conglomeration method is to transmit all packets addressed to the same destination station as a single conglomerated assembly. The destination station will then unconglomerate the packets and reassemble the message using conventional TCP methods. However, by conglomerating message packets as a function of the ultimate destination station, multiple transmissions may be required to a radio which is shared by multiple destination stations. Thus, conventional conglomeration methods do not take advantage of the fact that some destination stations utilize a common radio and would permit a higher level of conglomeration and increased message throughput.

[0009] Compression of messages prior to transmission is another common way to conserve the available bandwidth, and thus transmission time and capacity. Typically, all message packets are compressed prior to transmission to reduce the size of each message packet. However, compression of a packet may not result in a smaller message packet.

[0010] Some message packets, due to the nature of the data contained, i.e., some JPEG and video files, are not well suited for compression and will actually become larger after compression. Thus, compression of all pack-

ets may result in increasing the bandwidth required for some messages.

[0011] Further, in a conventional wireless TCP/IP environment, the radios are not capable of identifying an acknowledgment message received from a destination station. For example, a source station sends a retransmit message to its associated radio for retransmission if it does not receive an acknowledgment message from the destination station in a predetermined period of time. Even if the radio receives an acknowledgment of the successfully transmitted packet, the radio will unnecessarily retransmit the packet due to the inability of the radio to identify the acknowledgment message. Additionally, once the TCP retransmit message has been sent from the source station to the source radio, there is no mechanism to prevent the radio from retransmitting the packet should the source station receive the acknowledgment message later than anticipated but prior to retransmission by the source radio.

[0012] In a conventional communication network, messages are generally transmitted as a function of the priority of the message. Generally, high priority messages are transmitted before lower priority messages; the goal being to maximize the number of messages sent in order of priority. As a result, lower priority messages may "expire" or exceed their "time to live" prior to transmission so that higher priority messages can be sent, causing a loss of communication.

[0013] A communications network which transmits solely as a function of the priority of the messages (a "push" transmission method) results in excessive "idle" time for the network and reduces the message throughput in the system. In a "push" communication system, once a high priority message is selected, the source radio will transmit the selected message prior to selecting the next highest priority message for transmission. If the destination radio for the selected message is unable to receive, the source radio will wait idly for the destination radio to become available. This idle time reduces the message throughput of the system and contributes to the expiration of lower priority messages prior to transmission.

[0014] In some communication systems, the idle time may prevent consideration of higher priority messages that may have been received while waiting for a destination station to become available. Other communication systems will abort the transmission of a message if a higher priority message is received from the source station for transmission, adding further time delays and thus decreasing the message throughput.

[0015] The present invention is directed to solving some of the previously identified problems by increasing the message throughput or capacity of a system while conserving bandwidth and transmission time. In one aspect, applicant's priority manager considers not only the priority of the messages to be transmitted, but also the time to live of each message, whether the message is voice or data, and the availability of the destination radio

to receive.

[0016] In another aspect, applicant's conglomeration manager conglomerates packets destined to the same destination radio, without regard to the message's destination station thereby increasing the percentage of conglomeration.

[0017] In a further aspect, the conglomeration manager also considers whether compression will reduce or increase the size of the conglomerated assembly, and will bypass the compression algorithm if sufficient reduction in bandwidth is not achieved.

[0018] In yet another aspect, applicant's TCP filter reduces unnecessary retransmissions by reducing the delays associated with the recognition of an acknowledged packet.

[0019] An object of the present invention is to provide a novel method and system of conglomerating message packets in a radio network thereby increasing the message throughput the network, and to provide a novel method and system of transmitting message packets as a function of the availability of the destination radio, and for prioritizing the transmission of messages as a function of the urgency of the message packets.

[0020] The present invention includes a method of conserving bandwidth in sending plural message packets over a radio network where each radio is defined by a radio network address and where each message packet is addressed to a destination station comprising the steps of:

- a) determining the unique radio network address of the radio associated with the destination station for each message packet;
- b) conglomerating plural message packets destined for a common radio network address into a conglomerated assembly;
- c) framing the conglomerated assembly;
- d) transmitting the conglomerated assembly over the radio network to the common radio network address;
- e) receiving and reformatting the conglomerated assembly into individual message packets;
- f) delivering the individual message packets to their respective destination stations

whereby plural message packets are transmitted as a conglomerated assembly rather than as individual message packets.

[0021] The invention also includes a system for conserving bandwidth in a communication network wherein message packets are transmitted to a destination station and each destination station includes at least one destination radio and where destination stations may share a common destination radio, comprising:

means for determining the unique radio network address of the destination radio associated with the destination station for each message packet;

means for conglomerating plural message packets destined for a common destination radio network address into a conglomerated assembly;
 means for transmitting the conglomerated assembly over the radio network to the common radio network address; and
 means for receiving and reformatting the conglomerated assembly into individual message packets for delivery to their respective destination stations so as to transmit plural message packets as a conglomerated assembly rather than as individual message packets.

[0022] The invention will now be described, by way of example, with reference to the accompanying drawings in which:

Figure 1 is a high level schematic representation of the elements of a telecommunications system.
 Figure 2 is a high level schematic representation of the elements of a station and a radio of Figure 1.
 Figure 3 is a high level schematic representation of the elements of a telecommunications system.
 Figure 4 is a pictorial representation of the message queue and radio queue of Figure 2.

[0023] Figure 1 illustrates a conventional communication network for transmitting message packets according to the methods of the present invention. The radios 200 of the type illustrated in Figure 1 operate as mini LANs over the wireless media. The radios 200 can comprise a plurality of subnets and are capable of transmitting and receiving data and voice. Each of the radios of the subnet are connected via an Ethernet link 110 to stations 100 for managing the data. A plurality of radios 200 may also be connected via an Ethernet link 110 and may be connected to a router that provides access to stations 100 and a fixed network backbone.

[0024] The communication system of Figure 1 may employ industry standard protocols, such as Internet Protocol (IP) or User Datagram Protocol (UDP) for communicating between radios and stations.

[0025] All interface software may be resident in the radios 200 except for the software used to configure the radios. Each of the radios can be configured by downloading software to define and configure operating parameters, such as subnet membership and subnet parameters. Subnet membership creates a subnet, names radios, allocates named radios to the subnet and provides a unique radio network address or subnet address for each radio. The subnet parameters configure the operating parameters of each subnet.

[0026] With reference to Figure 2, a station 100 in the network of Figure 1 may be an off the shelf personal computer, laptop or other device capable of executing standard communications files and protocols including Electronic Mail (e-mail) 101, File Transfer 102, Simple Mail Transfer File (SMTP) 103, Post Office Protocol

(POP) 104, File transfer Protocol (FTP) 105, Transmission Control Protocol (TCP) 106, User Datagram Protocol (UDP) 107, and Internet Protocol (IP) 108.

[0027] A Station 100 may be coupled to a radio 200 in the network of Figure 1 via an Ethernet connection 110 to communicate with the radio 200 via the IP circuit 203. The IP circuit 203 routes the message packets to the TCP filter 204. The TCP filter 204 compares the received message with the messages in the message queue 205 and discards the received message if it is a duplicate of a message stored in the queue. Message packets from the TCP filter 204 are stored in message queue 205.

[0028] Messaging applications 202, such as Global Positioning Satellite (GPS) messaging and gateway messaging may also be applied to the message queue 205.

[0029] The radio queue maintains a list of the destination radios associated with the messages in the message queue. The priority manager 206 is responsible for ranking the order of the message packets in the message queue 205, maintaining a database of the availability status of all radios in the network or subnet, ranking the order of the destination radio addresses in the radio queue 208, and selecting an available destination radio for transmission.

[0030] Packet conglomerator 207 conglomerates individual message packets destined for the same destination radio into a conglomerated assembly. Packet conglomerator 207 may then compress and encrypt the conglomerated assembly.

[0031] The selected destination station for transmission is passed from priority manager 206 to channel access 209. Channel access module 209 may utilize various conventional methods to provide radio 200 with a transmission channel.

[0032] The channel access addresses the data drivers 220 and the smart modem 222. The conglomerated assembly is then sent to data drivers 220 and the smart modem 222 for transmission to the selected destination radios.

[0033] With reference to Figure 3, a station 100 in the network of Figure 1 may be connected to one or more radios 200 through the Ethernet and a radio may be connected to one or more stations through the Ethernet. For example, a radio 201 may be connected to two stations 120 and 130 through Ethernet connection 110. Each radio and each station may be assigned a unique address for the purpose of transmitting message packets within the communication network.

[0034] In one embodiment of the present invention, conventional IP subnet masking is used to route the data packets in the system. A station may be assigned an IP address, while individual applications within a station may be assigned an associated IP port. Likewise, a radio may be assigned an IP address or may be identified by a unique physical address (Subnet 2, Radio 3). For example, the lowest three IP address characters of the

destination station may be used for the unique radio network address or radio subnet address of the destination radio.

[0035] In operation, a station can send a message packet to any other station through its associated radio. For example, if the communication network of Figure 3 is operating using TCP as the reliable transport protocol, a source station 100 may send a TCP/IP message packet for transmission to a destination station 120 through the source station's associated source radio 200. The source radio 200 will transmit the message packet to the destination radio 201 associated with the destination station 120. Upon receipt of the message packet, the destination radio 201 will transfer the message packet to the destination station 120 through the Ethernet connection 110 or such other conventional means. Once the destination station 120 receives the message packet, it will send a TCP/IP acknowledgment message to the destination radio 201 for transmission to the source station 100 through the associated source radio 200. If the source station 100 does not receive the TCP acknowledgment within some predetermined period of time, the source station 100 will send a TCP retransmit message to the source radio 200 for retransmission of the message packet to the destination station 120.

[0036] The communication system architecture of the present invention is designed to maximize capacity with packet conglomeration, compression, TCP message filtering and message prioritizing techniques. Additionally, the architecture reduces the costs associated with unnecessary keying of the radios and minimizes the electronic footprint by reducing the number and length of transmissions required to transmit the IP packets.

[0037] The present invention utilizes a number of unique methods to increase the message throughput of the communications system while at the same time reducing the number of transmissions required to deliver the same number of message packets in a conventional communications system. The message throughput is increased through the use of a priority manager which maximizes the delivery of messages within their time to live and reduces the idle time waiting for an available destination radio. The number of transmissions is reduced through a novel message conglomerator and through the use of a novel TCP filter which eliminates unnecessary retransmissions.

[0038] The systems and methods disclosed herein are applicable to both free space communications, i.e., radio, microwave, satellite, wireless LANs, cellular and optical, as well as wired communications, although the advantages of the applicant's invention may be more beneficial to wireless applications where conserving bandwidth is of significant concern.

[0039] With reference to Figure 2, the priority manager 206 maximizes the number of message packets delivered prior to expiration by ranking the messages in the message queue as a function of the message's time to live, and by transmitting messages as a function of

the availability of the destination radios to receive.

[0040] Each message packet has associated with it a time to live and a priority (typically assigned by the originator of the message) as well as a reference time stamp corresponding to the receipt of the message in the message queue 205.

[0041] The priority manager 206 assigns an urgency to each message as a function of the time to live and priority of the message, taking into account the reference time and the current time. The message packets are then ranked in the message queue as a function of urgency, with the most urgent message ranked highest.

[0042] Each message packet in the message queue 205 is addressed to a destination station, and each destination station has one or more destination radios to receive the transmitted message. The priority manager maintains a radio queue 208 of the addresses of the destination radios associated with the message packets in the message queue 205. The list of radio addresses in the radio queue 205 are ranked as a function of the urgency of the message packets destined for each radio, with the highest ranked radio corresponding to the most urgent message.

[0043] One embodiment of the present invention utilizes a "pull" rather than a "push" transmission method to maximize the throughput of the message packets transmitted in the network, i.e., a source radio transmits message packets as a function of the availability of the destination radio of the message packets. If a destination radio of the highest ranked message packet is not available, the next highest ranked available destination radio is selected and its corresponding message packets are transmitted. Thus, the transmitted message packets may be ranked lower than some of the message packets remaining in the queue.

[0044] The priority manager monitors the status of all destination radios in the communications network or subnetwork and maintains the availability status of each radio in a database. The priority manager then selects the highest ranked destination radio from the radio queue 208 that is identified as available in the priority manager's database and transmits all message packets destined for the selected destination radio.

[0045] After each transmission, the priority manager 206 updates the message queue 205 to account for the remaining time to live for each message packet and re-ranks the order of the message packets remaining in the message queue 205, and re-ranks the destination radios remaining in the radio queue 208.

[0046] The priority manager eliminates the lost time in switching to a previously unavailable destination radio higher in the radio queue which becomes available after a radio lower in the queue has been selected to transmit. Once a destination radio has been selected, the messages for the selected radio are transmitted without regard to the availability status of the remaining radios in the radio queue. The decision not to abort the transmission to the lower ranked radio results in eliminating the

lost time associated with switching from one available radio station to a higher ranked radio station which became available.

[0047] The operation of the priority manager 206 can be described with reference to Figures 3 and 4. The messages in the message queue 205 are maintained in order of urgency. As shown in Figure 4, for example, message packet A is destined to radio 201, has a priority of 10 (high), a time to live of ten seconds and is ranked as having the highest urgency in the message queue 205. Message packet B is destined to radio 202 or 203, has a priority of 2 (low) and a time to live of 60 seconds, and is ranked second in urgency in the message queue 205. Message packet C is destined to radio 205, has a priority of 2, a time to live of ninety seconds and is ranked third in urgency. Message packet D is destined for radio 202 or 203, has a priority of 7, a time to live of ninety seconds and is ranked fourth in urgency. Message E is destined for radio 201, has a priority of 10, a time to live of ninety seconds and is ranked fifth in urgency.

[0048] The priority manager 206 maintains a list of the destination radios for message packets A-E in the radio queue 208. The radio queue 208 ranks the destination radios associated with messages A-E in the message queue 205 as a function of the urgency of the messages A-E. For example, radio 201 is the destination radio of message A and is therefore ranked first in the radio queue (even though message E also destined for radio 201 is ranked last). Radios 202 and 203 are the destination radios of Messages B and D and are ranked second and third in the queue. (In this example, the respective ranking of radios 202 and 203 is not material because both radios are associated with the second ranked message B). Radio 205 is the destination radio of Message C and is ranked fourth in the radio queue.

[0049] Priority manager 206 maintains a database of the availability status of radios 201, 202, 203 and 205. If priority manager determines that radio 203 is the highest ranked available radio, message packets B and D would be pulled from the message queue 205 and transmitted to radio 203 for delivery to their respective destination stations. Message queue 205 would then update and re-rank messages A, C and E remaining in the message queue 205 and update and re-rank the destination radios for messages A, C, and E remaining in the radio queue 206.

[0050] The described radios have the capability of transmitting either voice or data, and thus the priority manager 206 of the present invention has the capability to ensure that voice messages are assigned a higher urgency, and thus are transmitted prior to, data messages. For example, any voice message received at the source radio from the source station can be assigned a high priority and a short time to live such that the determined urgency will be greater than any data message. Thus, the priority manager 206 can be programmed to always rank a voice message packet higher in the message queue 205 than a data packet.

[0051] The message queues and the radio queues are distributed throughout the radio network, i.e., each radio maintains its own queues, and therefore the priority manager in each radio can independently manages message transmission order and can take advantage of simultaneous transmissions utilizing conventional trunking methods resulting in increased message throughput in the communication network.

[0052] Packet conglomeration is an important issue due to the bandwidth constraints and the half duplex nature of some wireless systems. In another embodiment of the present invention, a unique packet conglomeration method is used to reduce the number of transmissions required to transmit the message packets in the message queue. Reducing the number of transmissions results in reducing the bandwidth necessary and reduces the operating costs of the system.

[0053] Additionally, reducing the number of transmissions is of paramount importance in an environment vulnerable to electronic surveillance. The reduced number of transmissions contributes to a reduction in the electronic signature of the radio.

[0054] With Reference to Figure 2, once the highest ranked available destination radio is determined by the priority manager 206, a conglomerated packet is formed. Message packets destined to the same radio are conglomerated by the packet conglomeration manager 207 into a single assembly.

[0055] In conventional conglomeration methods, conglomerated assemblies are formed as a function of the ultimate destination station of the message packets without regard to intermediate points such as destination radios. In contrast, the present invention determines intermediate transmission points in common between message packets, i.e., destination radios, to thereby permit message packets to be conglomerated even though they are not destined to the same ultimate destination station. This improved conglomeration method increases the number of message packets available for conglomeration into a single assembly.

[0056] For example, with reference to Figures 3 and 4, message A is addressed to station 120 and message E is addressed to station 130. Station 120 and Station 130 utilize the same destination radio 201. If radio 201 is the highest available destination radio, all messages destined for radio 201, messages A and E in this example, will be pulled from the message queue 205 by the priority manager 206 and sent to packet conglomerator 207. Packet conglomerator 207 will conglomerate Messages A and E using conventional conglomeration methods into a conglomerated assembly for transmission as a single entity to destination radio 201.

[0057] The receiving radios will check for the destination subnet address of the conglomerated assembly and ignore the assembly if not targeted to itself. The destination radio may perform error correction and check sum validation using conventional methods. If the checksum validates, the payload data is reformatted in-

to individual message packets and routed to the external data interface for delivery to the appropriate destination station and ports.

[0058] The present conglomeration manager has several advantages over the prior art. First, the message packets are conglomerated as a function of the destination radio, without regard to the ultimate station or port address. By conglomerating message packets on the basis of destination radio address, less transmissions are required than if the packets are conglomerated on the basis of station address or port address as is typically known.

[0059] Second, the message packets for a destination radio are not conglomerated until it has been determined that the destination radio is available. By waiting until an available destination station has been identified, the most recently entered message packets in the message queue are considered for conglomeration and thus more data is available for conglomeration. This reduces the number of transmissions and thus the required bandwidth that may otherwise be necessary. Additionally, the conglomeration assembly includes the most recent message packets addressed to the destination radio.

[0060] Many conventional conglomeration managers conglomerate message packets before determining whether the destination radio or node is available. The conglomerated assembly then may sit idle while waiting for the destination radio or node to become available while messages that may have recently entered the message queue for the selected destination radio are not considered for conglomeration with the currently conglomerated assembly.

[0061] In another embodiment of the present invention, a unique compression method may be utilized after the message packets have been conglomerated. Compression, following conglomeration, may further reduce the number of transmissions required to deliver all the message packets in the message queue even further.

[0062] After the conglomerated assembly is formed, packet conglomeration manager 207 determines if compression of the conglomerated assembly is desirable. Packet conglomeration manager 207 compresses the conglomerated assembly and compares the size of the compressed assembly with the size of the uncompressed assembly. If the size of the compressed assembly is larger than the uncompressed assembly, then compression is undesirable and the conglomerated assembly will be transmitted without compression. Typically, files such as JPEG files and video streams result in larger files when compressed and therefore compression is not desirable.

[0063] The method of conglomerating the message packets only after it is determined that the destination station is available is beneficial to the compression efficiency of the present invention. As the amount of data being compressed increases, the compression efficiency of the compression method increases. As described

earlier, the conglomeration method of the present invention tends to increase the message packets available for conglomeration and thus also available for compression which would therefore tend to increase the compression efficiency of the present method, further reducing the bandwidth that would have otherwise been necessary.

[0064] Packet conglomeration manager 207 may also encrypt the conglomerated message prior to transmission. Encryption may be accomplished using well known encryption technology, details of which are well known in the art and therefore not discussed in the present application. Such encryption methods may include symmetric key encryption and public key encryption.

[0065] Encryption is accomplished after compression because once data is encrypted, the randomize order of the data makes compression utilizing conventional compression techniques more difficult.

[0066] Thus, many message packets sent from one station to another are transferred as a single conglomerated assembly, rather than the usual single packet per transmission, avoiding significant bandwidth waste and greatly reducing the number of transmissions required to transmit the message packets.

[0067] The destination radio may also utilize an automatic detection method to determine if the received assembly is compressed. For example, if the transmitted assembly is not compressed, as discussed above, it is important for the destination radio to identify the assembly as uncompressed so that the uncompression algorithm resident in the destination radio can be skipped. One such method of determining whether the received assembly is compressed would be to check for a compression identifier located in the header of the assembly.

[0068] In yet another embodiment of the present invention, a TCP filter is utilized to prevent the retransmission of successfully transmitted message packets.

[0069] In a conventional communication network, TCP may be used as the reliable transport protocol for acknowledging IP packets successfully received at a destination station. The TCP system will re-transmit all of the unacknowledged data that it has received if the source station does not receive a timely acknowledgment from a destination station as a means for guaranteed delivery. Prior art radio TCP systems will often unnecessarily re-send packets through radio networks because of inherent delays in receiving timely acknowledgments due to the half-duplex nature and low bandwidth of wireless communication.

[0070] In the present radio system, radio traffic is reduced by eliminating the unnecessary TCP re-send packets by reducing the time it takes the communication network to identify a message packet acknowledgment.

[0071] With reference to Figure 3, a source radio 200 will maintain a message queue of all message packets received from the source station 100 for transmission to a destination station 130. As a conglomerated assembly is transmitted from the source radio 200, the assembly's

message packets are removed from the message queue. When the destination station 130 receives a message packet targeted to it, the destination station 130 sends an acknowledgment message to the source station 100 acknowledging the receipt of the message packet. If the source station 100 does not receive the acknowledgment in a predetermined period of time, the source station 100 will send a TCP retransmission to the source radio 200. The retransmission will be stored in the message queue of the source radio 200 for retransmission to the destination station 130.

[0072] The radios of the present invention are capable of identifying received acknowledgment messages, thereby obviating the necessity of a proxy and avoiding the time delay associated with having to wait for the acknowledgment message to reach the source station.

[0073] In one embodiment of the present invention, unnecessary retransmissions are avoided through the use of "peeking" technology. A source radio "peeks" at received messages in order to identify an acknowledgment message received from a destination station. Once an acknowledgment message has been identified, the source radio can then compare the received acknowledgment message with the messages in the source radio's message queue to determine if a corresponding TCP retransmission message has been received from the source station. If the received acknowledgment message matches the a TCP retransmission message in the message queue of the source radio, the TCP retransmission message is removed from the message queue and discarded. Thus, the "peeking" technology of the present invention prevents the retransmission of messages, even though the acknowledgment message has not yet been received at the source station.

[0074] In order to determine if the acknowledgment message corresponds with the TCP retransmit message, TCP filter 204 in the source radio 200 may compare, the sequence number, destination address, source address, destination port, source port, and TCP control bits of the messages. In the alternative, any other message identifiers may be compared which would assist in the identification of a TCP retransmit message corresponding to the received acknowledgment message.

[0075] The operation of the TCP filter described with reference to Figure 4. For example, message packet B is sent from a source station 100 through a source radio 200 for transmission to a destination radio 203 for delivery to a destination station 140. Station 100 will wait to receive a TCP acknowledgment message from destination station 140. If the acknowledgment message is not received at source station 100 after a predetermined period of time, source station 100 will send a TCP retransmit message for message packet B to source radio 200. Source radio 200 will store the TCP retransmit message in its queue for retransmission to destination radio 203, and may use the priority management, con-

glomeration and compression techniques described previously.

[0076] Source radio 200 will "peek" at all messages received from other radios and compare the received messages with the messages in its message queue 205 to determine if a received acknowledgment messages corresponds to a TCP retransmit message. For example, if destination radio 203 transmits a TCP acknowledgment message from station 140 to source radio 200 for delivery to source station 100, the source radio 200 will peek at the acknowledgment message, identify the acknowledgment message as corresponding to the TCP retransmit message in its message queue, and discard the TCP retransmit message.

[0077] If the source radio 200 does not receive a TCP acknowledgment message before it becomes time to transmit the TCP retransmit message, message packet B will be retransmitted to destination.

[0078] The present invention increases the message throughput or capacity of a communication system while conserving bandwidth and transmission time.

[0079] The priority manager considers not only the priority of the messages to be transmitted, but also the time to live of each message, whether the message is voice or data, and the availability of the destination radio to receive.

[0080] Applicant's conglomeration manager conglomerates packets destined to the same destination radio, without regard to the messages destination station thereby increasing the percentage of conglomeration.

[0081] Applicant's conglomeration manager also considers whether compression will reduce or increase the size of the conglomerated assembly, and will bypass the compression algorithm if sufficient reduction in bandwidth is not achieved.

[0082] Applicant's TCP filter reduces unnecessary retransmissions by reducing the delays associated with the recognition of an acknowledged packet.

[0083] A system and method of increasing message throughput in a communications system utilizing priority management, conglomeration and compression, TCP retransmission filtering and pull transmission. The priority manager ranks the messages in a message queue as a function of the priority and time to live of each message. The conglomeration conglomerates messages into assemblies destined for the same destination radio. The TCP filter prevents the retransmission of the successfully received messages. The messages are transmitted as a function of the availability of the destination radio to receive.

Claims

1. A method of conserving bandwidth in sending plural message packets over a radio network where each radio is defined by a radio network address and where each message packet is addressed to a des-

tionation station comprising the steps of:

- a) determining the unique radio network address of the radio associated with the destination station for each message packet;
- b) conglomerating plural message packets destined for a common radio network address into a conglomerated assembly;
- c) framing the conglomerated assembly;
- d) transmitting the conglomerated assembly over the radio network to the common radio network address;
- e) receiving and reformatting the conglomerated assembly into individual message packets;
- f) delivering the individual message packets to their respective destination stations

whereby plural message packets are transmitted as a conglomerated assembly rather than as individual message packets.

2. A method as claimed in claim 1 **characterized by** the step of compressing the conglomerated assembly prior to transmission, in which the step of compressing includes the step of evaluating the size of the compressed assembly with the size of the uncompressed assembly, and the step of selecting the smaller of the compressed assembly or the uncompressed assembly for transmission.
3. A method as claimed in claim 2 **characterized by** the step of encrypting the conglomerated assembly prior to transmission.
4. A method as claimed in claim 1 wherein the step of framing includes applying headers, checksums and forward error correction coding, and the step of reformatting includes the step of automatically detecting whether the received assembly is compressed.
5. A method as claimed in claim 1 wherein the message packets are Internet protocol (IP) packets and the destination station addresses are IP addresses, radio network addresses are IP addresses.
6. A method of transmitting message packets in a plural station communication system in which each station has an associated address and at least one corresponding radio, each radio having a radio network address, comprising the steps of :
 - a) conglomerating the message packets into conglomerated assemblies as a function of the unique radio network address corresponding to the destination station address of the message packets; and
 - b) transmitting the conglomerated assemblies

to the destination radio corresponding to the destination station associated with the conglomerated assembly,

to thereby reduce the number of transmissions required to transmit the message packets to their corresponding destination stations.

7. A method as claimed in claim 6 **characterized by** the step of compressing the conglomerated assembly prior to transmission, including the step of encrypting the conglomerated assembly after compression and prior to transmission, and transmitting the conglomerated assemblies as a function of the availability of the respective destination radio for each assembly.
8. A system for conserving bandwidth in a communication network wherein message packets are transmitted to a destination station and each destination station includes at least one destination radio and where destination stations may share a common destination radio, comprising:
 - means for determining the unique radio network address of the destination radio associated with the destination station for each message packet;
 - means for conglomerating plural message packets destined for a common destination radio network address into a conglomerated assembly;
 - means for transmitting the conglomerated assembly over the radio network to the common radio network address; and
 - means for receiving and reformatting the conglomerated assembly into individual message packets for delivery to their respective destination stations
 so as to transmit plural message packets as a conglomerated assembly rather than as individual message packets.
9. A system as claimed in claim 8 wherein the means for conglomerating includes means for compressing the conglomerated assembly, in which the means for compressing includes means for comparing the size of the conglomerated assembly before and after compression, and means for selecting the smaller of the compressed or uncompressed assembly for transmission, and the destination radio includes means to automatically determine if the received assembly is compressed.
10. A system for conserving bandwidth in a communication network wherein message packets are transmitted to a destination station and each destination station includes at least one destination radio and

where destination stations may share a common destination radio, comprising, means for conglomerating the message packets into conglomerated assemblies as a function of the unique radio network address corresponding to the destination station address of the message packets, means for selecting a destination radio for transmission of a conglomerated assembly as a function of the availability of the destination radio for the conglomerated assembly, means for transmitting the conglomerated assembly to the selected destination radio, the means for conglomerating includes means for compressing.

15

20

25

30

35

40

45

50

55

10

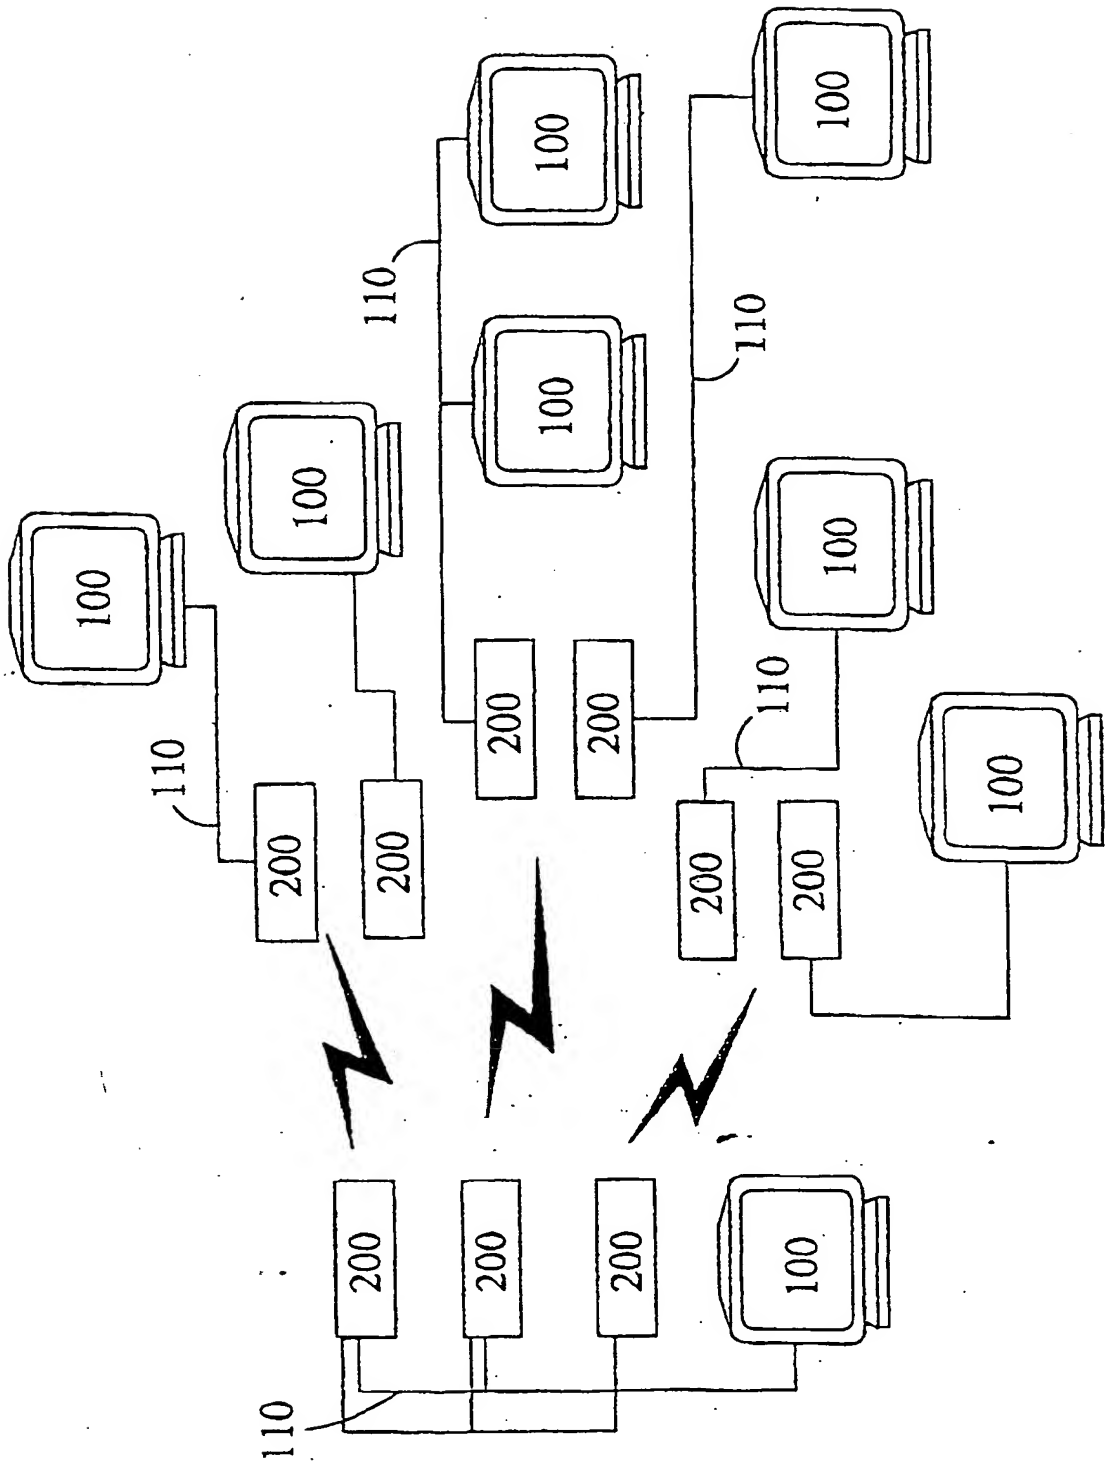


FIGURE 1

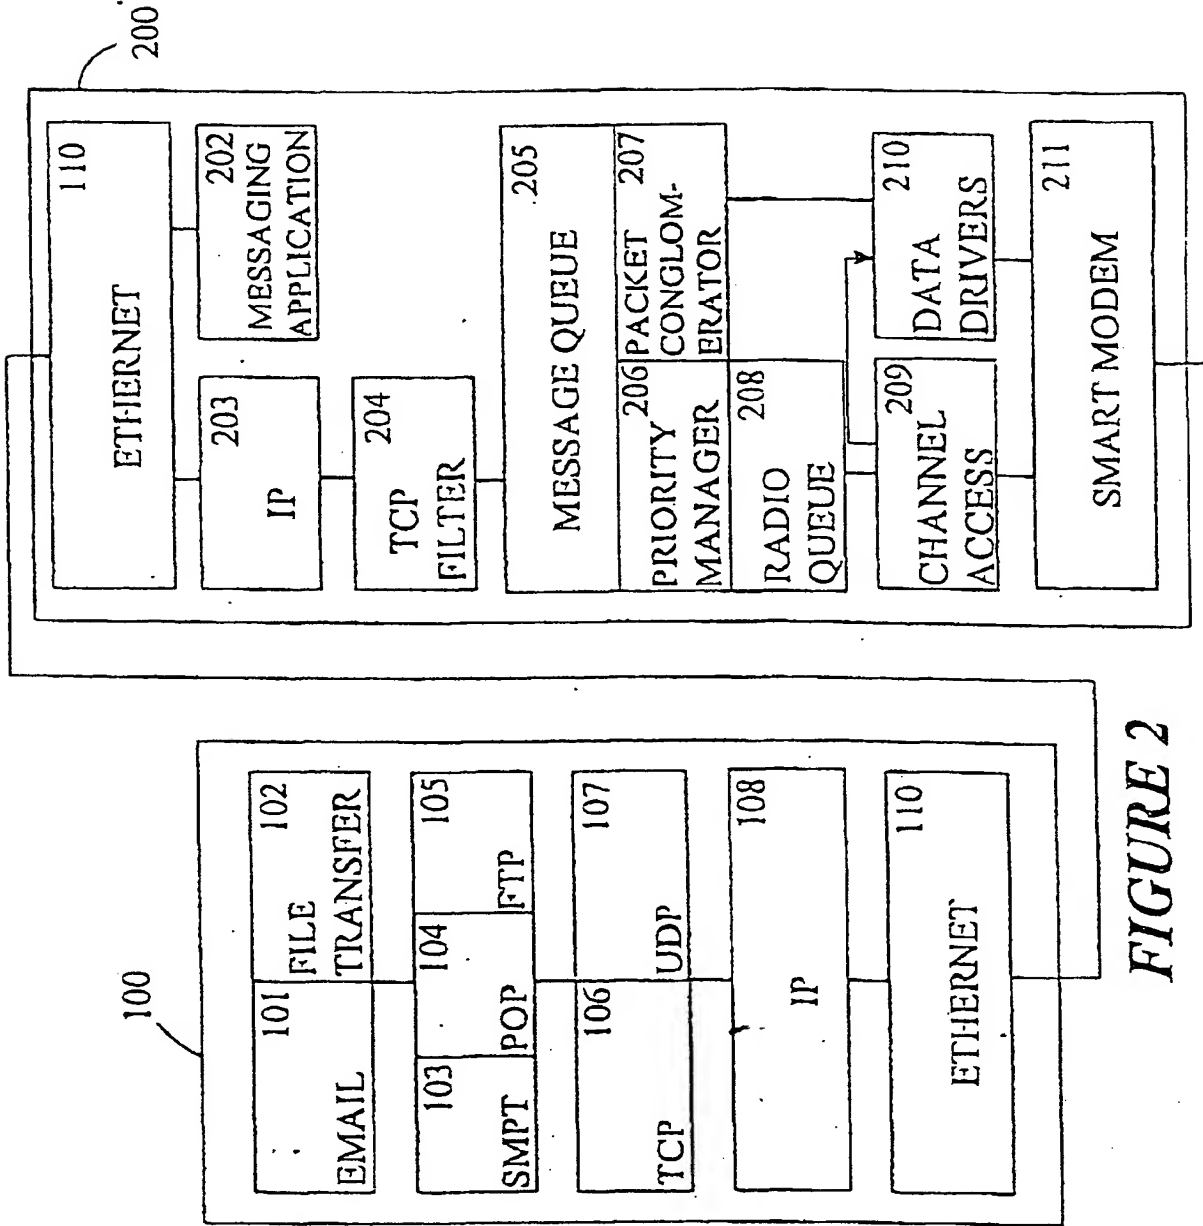


FIGURE 2


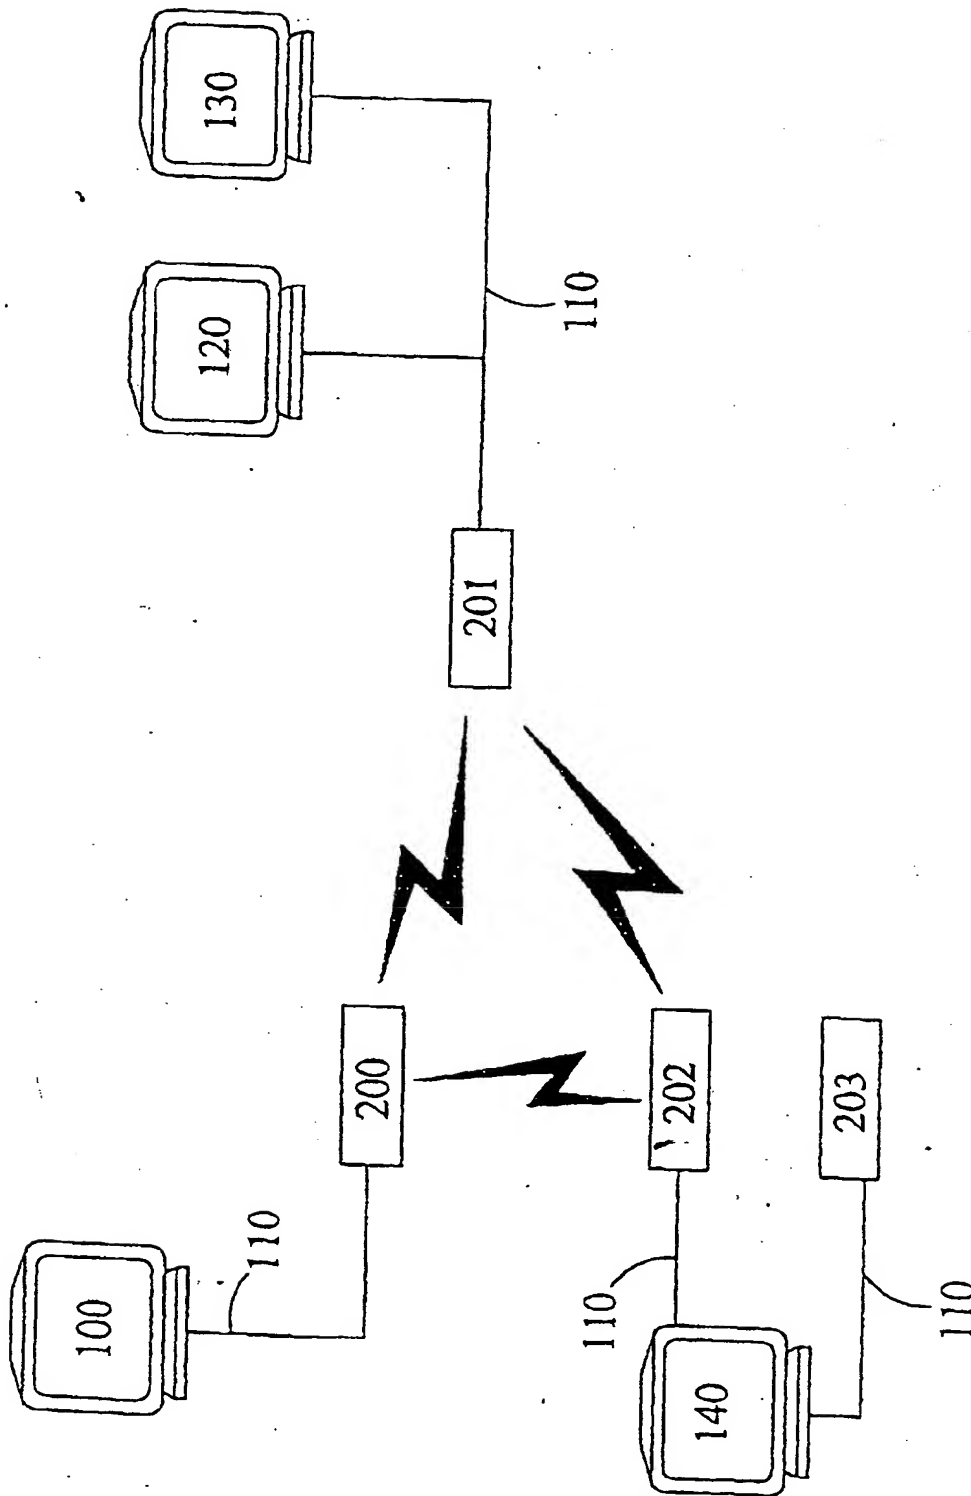


FIGURE 3

MESSAGE QUEUE 205				RADIO QUEUE 200	
MESSAGE #	PRIORITY	TTL	DEST RADIO	RADIO #	#OF MESSAGES
A	10	10	201	201	2
B	2	60	202,203	202	2
C	2	90	205	203	2
D	7	90	202,203	205	1
E	10	90	201		
.					
.					
.					
.					
Z					

FIGURE 4



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 1 189 397 A3**

(12)

EUROPEAN PATENT APPLICATION

(88) Date of publication A3:
23.07.2003 Bulletin 2003/30

(51) Int Cl.7: **H04L 12/56**, H04L 29/06,
H04L 12/28, H04L 12/58

(43) Date of publication A2:
20.03.2002 Bulletin 2002/12

(21) Application number: 01122034.0

(22) Date of filing: 13.09.2001

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR
Designated Extension States:
AL LT LV MK RO SI

(72) Inventor: **Kroon, Jeffrey**
Canandaigua, NY 14424 (US)

(74) Representative: **Fleuchaus, Leo, Dipl.-Ing. et al**
Fleuchaus & Gallo
Melchiorstrasse 42
81479 München (DE)

(30) Priority: 13.09.2000 US 661405

(71) Applicant: **HARRIS CORPORATION**
Melbourne Florida 32919 (US)

(54) **A system and method of conserving bandwidth in the transmission of message packets**

(57) A system and method of increasing message throughput in a communications system utilizing priority management, conglomeration and compression, TCP retransmission filtering and pull transmission. The priority manages ranks the messages in a message queue as a function of the priority and time to live of each mes-

sage. The conglomeration conglomerates messages into assemblies destined for the same destination radio. The TCP filter prevents the retransmission of the successfully received messages. The messages are transmitted as a function of the availability of the destination radio to receive.

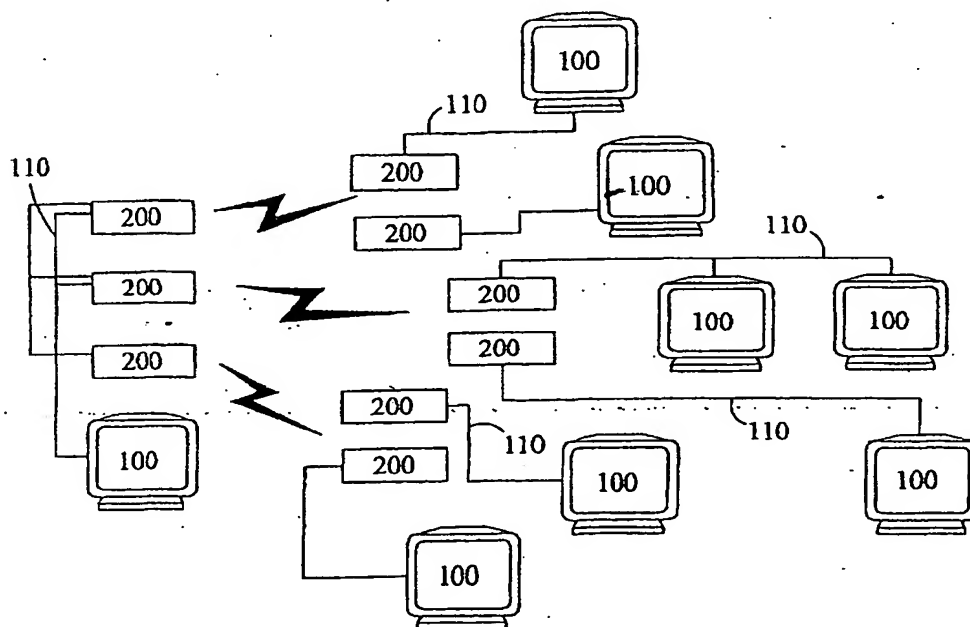


FIGURE 1



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 01 12 2034

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
Y	US 5 502 726 A (FISCHER MICHAEL) 26 March 1996 (1996-03-26) * column 1, line 8-52 * * column 2, line 28-41 * * column 5, line 18-31 * * column 6, line 19-22 * * column 8, line 19-26 * * column 7, line 29-39 * * column 11, line 62-65 * * column 12, line 30-46 * ---	1,4-8,10	H04L12/56 H04L29/06 H04L12/28 H04L12/58
Y	US 5 572 528 A (SHUEN PAULINE) 5 November 1996 (1996-11-05) * column 14, line 46-55; figure 1 * ---	1,6,8,10	
Y	WO 99 09707 A (MCI COMMUNICATIONS CORP) 25 February 1999 (1999-02-25) * page 3, line 5-20 * ---	4,5,7	
A	* page 7, line 15-25 * * page 8, line 26 - page 9, line 8 * * page 21, line 4-14 * * page 23, line 3-19 * * page 32, line 5 - page 35, line 6 * * page 36, line 15 - page 37, line 8 * -----	1-3,6, 8-10	TECHNICAL FIELDS SEARCHED (Int.Cl.7) H04L
The present search report has been drawn up for all claims			
Place of search MUNICH		Date of completion of the search 9 May 2003	Examiner Isopescu, C
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EPO FORM 1503 03/82 (P01001)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 01 12 2034

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

09-05-2003

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5502726 A	26-03-1996	AU 3590893 A	01-09-1993
		EP 0578812 A1	19-01-1994
		JP 6506581 T	21-07-1994
		WO 9315572 A1	05-08-1993
US 5572528 A	05-11-1996	NONE	
WO 9909707 A	25-02-1999	US 6385647 B1	07-05-2002
		AU 8571098 A	08-03-1999
		WO 9909707 A1	25-02-1999

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

THIS PAGE BLANK (USPTO)

**ORIGINAL
NO MARGINALIA**